



# SIROMER Equipment

**Your Tractor's Best Friend**

## **SIROMER ROTOVATOR**



Designed to prepare a seed bed from previously worked soil.

Dig depth is adjusted by use of skids.

Semi offset to cover wheel tracks.

Gear driven by oil immersed and heavy duty wide precision ground spur gears.


Adjustable safety flap giving a smooth finish.

Comes complete with shear pin PTO shaft.

Fits most industry standard CAT I linkages.

A useful prop stand keeps the machine steady whilst not mounted.

MODEL	Overall Width	STRUCTURE WEIGHT	TILLING WIDTH	TILLING DEPTH	PTO SPEED	POWER REQUIRED
S40	1050	265kg	1045mm	150mm	540r/min	16-30hp
S41	1350	300kg	1345mm	150mm	540r/min	20-40hp
S42	1800	350kg	1795mm	150mm	540r/min	40-75hp

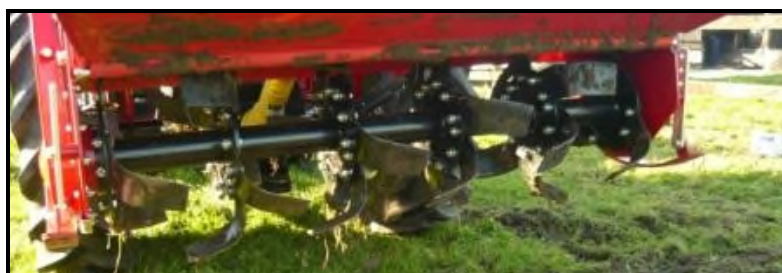

**Tel: 01253 799 029**  
**Fax: 01253 790 006**  
**Web: [www.siromer.co.uk](http://www.siromer.co.uk)**

Specification subject to change without notice.  
Information is for guidance only.